

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
23 December 2004 (23.12.2004)

PCT

(10) International Publication Number
WO 2004/110637 A1

(51) International Patent Classification?: **B04B 1/20**

(21) International Application Number:
PCT/SE2004/000814

(22) International Filing Date: 27 May 2004 (27.05.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0301779-5 18 June 2003 (18.06.2003) SE

(71) Applicant (for all designated States except US): **ALFA LAVAL CORPORATE AB** [SE/SE]; Rudeboksvägen 1, S-221 00 Lund (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **STROUCKEN, Klaus** [SE/SE]; Tallsättravägen 12, S-144 63 Rönninge (SE). **RIDDERSTRÅLE, Rolf** [SE/SE]; Heleneborgsgatan 21, S-117 31 Stockholm (SE). **GEIDING, Robert**

[SE/SE]; Morgonvägen 35, S-146 32 Tullinge (SE). **HÖGLUND, Kasper** [SE/SE]; Hagsättravägen 9, S-144 63 Rönninge (SE).


(74) Agent: **CLIVEMO, Ingemar**; Alfa Laval Corporate AB, Hans Stahles väg, S-147 80 Tumba (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: A SCREW CONVEYOR FOR A DECANter CENTRIFUGE

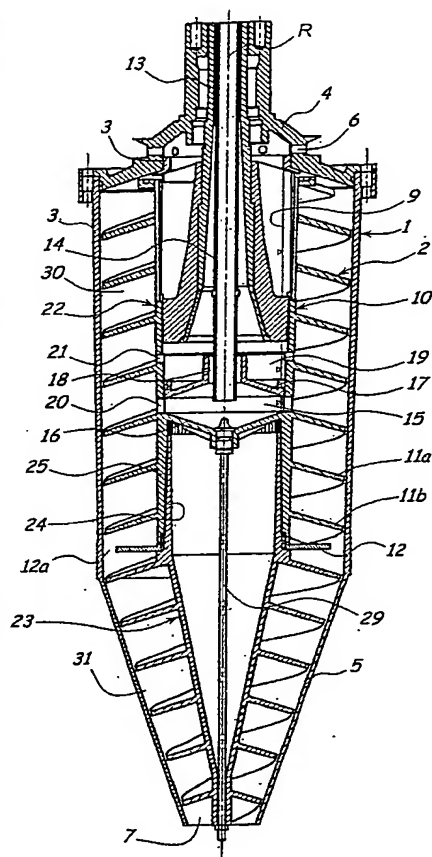

(57) Abstract: A screw conveyor (2) intended and formed for use in a decanter centrifuge for separation of solid particles from a fluid compound, comprising a central body (10), at least one conveyor thread (11a; 11b) and at least one baffle (12) bridging a flow path formed between different parts of the conveyor thread. The screw conveyor (2) has at least two originally separate parts (22, 23), each of which comprises a portion of said conveyor thread (11a; 11b) and which are kept together axially. The baffle (12) constitutes a separate member arranged to be kept in place between said parts (22, 23) of the screw conveyor, when these parts are kept together axially, and has a portion (26; 27) which forms a part of the conveyor thread (11a; 11b) in an area where the conveyor thread intersects with and extends past the baffle (12).



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

PCT/SE2004/000814 09 NOV 2005

A SCREW CONVEYOR FOR A DECANter CENTRIFUGE

The present invention relates to a screw conveyor intended and formed for use in a decanter centrifuge for separation of solid particles from a

5 fluid compound, in which such particles are suspended in a liquid having a smaller density than the particles, the decanter centrifuge comprising

- a rotor, which has an inlet for said compound, an outlet for separated solid particles and an outlet for liquid having been freed from solid particles, and which rotor is rotatable about a rotational axis at a first velocity,

10 and

- a screw conveyor, which is arranged in the rotor and is rotatable about the rotational axis at a second velocity different from the first velocity, the screw conveyor comprising

- a central body, which extends along the rotational axis,

15 - at least one conveyor thread, which extends like a screw thread along and about the central body and is supported by the same such that a screw shaped flow path is formed around the body, and

- at least one baffle, which bridges said flow path between different parts of the conveyor thread to prevent free movement of liquid and solid particles

20 along the flow path towards said outlet for solid particles.

A screw conveyor of this kind is described in US 3 885 734 and in US 3 934 792.

25 In a screw conveyor according to US 3 885 734 the above mentioned baffle has the form of an annular disc arranged in a plane substantially perpendicular to the rotational axis.

In a screw conveyor according to US 3 934 792, on the other hand, the

30 baffle is arranged between two adjacent parts of the conveyor thread,

extending substantially radially and axially with respect to said rotational axis.

Also WO 99/65610 shows a screw conveyor of the initially defined kind.

5

Traditionally, screw conveyors for decanter centrifuges have been manufactured out of metal, a strip of sheet metal having been formed into a screw thread and been welded along its radially inner screw-formed edge onto the central body. When desired a baffle of the kind defined above
10 has been welded to the screw thread and possibly even to the central body.

In WO 99/65610 it is mentioned that the rotor and the screw conveyor may be formed of several parts, being releasably connected to each other
15 (page 22) and also that the screw conveyor may be manufactured in one piece of plastic (page 15). However, it is not mentioned more precisely any method for manufacturing of a screw conveyor. A general method for manufacturing of plastic details is injection moulding. However, this method appears not to be appropriate for any of the embodiments of the
20 screw conveyor as shown in WO 99/65610. Thus, it does not appear to be possible to remove an injection-moulded screw conveyor from the mould by screwing it out thereof.

Also in US 5 800 332 there is shown a decanter centrifuge, in which the
25 rotor and the screw conveyor may be formed of several parts being releasably connected to each other.

An object of the present invention is to provide a construction for a screw conveyor, which construction makes possible a simple manufacture of the
30 screw conveyor - even if it is to be made of plastic - ensures transport-

ation of solid particles in the rotor past said baffle and gives a required stiffness and strength to the conveyor thread in an area where it intersects with the baffle.

- 5 Another object of the present invention is to provide a construction for a screw conveyor, which makes possible simple assembly of the screw conveyor.

According to the invention these objects may be obtained by means of a
10 screw conveyor of the initially defined kind, in which

- the screw conveyor comprises at least two originally separate parts, each of which comprises a portion of said conveyor thread and which are kept together axially,
- said baffle constitutes a separate member arranged to be kept in place
15 between said parts of the screw conveyor, when these are kept together axially, and
- the separate member has a portion, which forms a part of the conveyor thread in an area where the conveyor thread intersects with and extends past the baffle.

20

By the invention the different parts of the screw conveyor and said baffle may be manufactured each for itself. If the screw conveyor will be made of plastic, the different parts may be formed so that injection-moulding technique may be used.

25

In a preferred embodiment of the invention said separate member is arranged to be kept in place by said parts of the screw conveyor, when these are kept together axially. Furthermore, said parts of the screw conveyor are detachably connected to each other. This makes possible easy
30 exchange of said baffle, e.g. if it would appear that it has a size which is

not optimal for the separation process, in which the decanter centrifuge in question will be used. If required said baffle may be changed as a result of wear, for example.

- 5 Preferably, each of the parts of the screw conveyor also comprises a part of the central body. In that case, each of the parts of the central body is suitably provided with a substantially cylindrical portion having axial ribs and grooves, one of the parts having internal ribs and grooves and another of the parts having external ribs and grooves, arranged to keep the
- 10 different parts of the screw conveyor drivingly coupled together. The parts are arranged to be kept axially together by means of a member, which extends axially within the central body. Hereby, each of the parts may be easily exchanged, if required.
- 15 The invention is not limited to the screw conveyor comprising only one conveyor thread and only one baffle. In a preferred embodiment of the invention the screw conveyor comprises two conveyor threads extending like screw threads along and about the central body and being supported by the same such that two screw shaped flow paths are formed around
- 20 the body. Furthermore, the screw conveyor comprises a baffle of the defined kind for each of said flow paths, the baffles bridging the respective flow paths between different sections of the conveyor threads to prevent free movement of liquid and solid particles along the flow paths towards said outlet for solid particles. In a screw conveyor with two conveyor threads
- 25 an improved balance is obtained in the screw conveyor, providing improved operation characteristics for the decanter centrifuge.

In the case the screw conveyor has two baffles of the defined kind these may be formed as one single member arranged to bridge said two flow

30 paths and to be kept in place between said two parts of the screw con-

veyor. Each of the baffles may be formed as in either US 3 885 734 or US 3 934 792.

In a particular embodiment of the invention said single member may have
5 substantially the form of an annular disc having two diametrically opposed portions, of which one portion forms a part of one of said conveyor threads and the other portion forms a part of the other one of said conveyor threads. Then, the annular disc may comprise two additional diametrically opposed portions, each forming one of said two baffles, which bridge the
10 respective two screw-shaped flow paths. In this case the two baffles are formed as can be seen in US 3 885 734.

The invention is to be further described in the following with reference to the accompanying drawing, in which

15

Fig. 1 shows a longitudinal section of a decanter centrifuge comprising a rotor and a screw conveyor, an annular disc being kept between two parts of the screw conveyor, coupled together,

20 Fig. 2 shows a section of the screw conveyor according to Fig. 1 in a larger scale, said parts of the screw conveyor being situated at some axial distance from each other, and

Fig. 3 shows the annular disc in a larger scale and in perspective.

25

In figure 1 there is shown a decanter centrifuge comprising a rotor 1, which is rotatable at a certain velocity about a vertical rotational axis R, and a screw conveyor 2 arranged in the rotor 1 and rotatable about the same rotational axis R, though with a velocity differing from that of the
30 rotor 1. The decanter centrifuge is intended to be suspended vertically in

a way as shown in WO 99/65610. Therefore, the necessary arrangement for suspension and driving of the decanter centrifuge is not described herein.

- 5 The rotor 1 has a substantially cylindrical upper rotor part 3 comprising or being connected to a hollow rotor shaft 4, and a substantially conical lower rotor part 5. The rotor part 3 and the rotor shaft 4 are connected to each other by means of screws (not shown). Of course, alternative connection members may be used. The rotor parts 3 and 5 may be formed
10 as two separate parts being releasably connected with each other e.g. by means of screws (not shown).

The rotor 1 has several outlets 6 for liquid at its upper end and a centrally and axially directed outlet 7 for sludge at its lower part. In the area of the
15 liquid outlets 6, somewhat below these, a ring 8 is arranged, which forms an overflow outlet for liquid in the rotor flowing towards and out through the outlets 6. The ring 8 is arranged to maintain a free liquid surface in the rotor 1 at a radial level 9. The ring 8 is releasably arranged, which gives the possibility to choose rings with different inner diameter so that
20 the radial level 9 may be changed.

As can be seen from figure 1 the screw conveyor comprises a central body 10, which extends along the rotational axis R, two conveyor threads 11a and 11b, respectively; which extend like screw threads along and
25 about the central body 10, and a disc 12, which extends perpendicular to the rotational axis R from the central body 10 in a direction towards the surrounding rotor part 3. The disc 12 bridges said two flow paths from a radial level at a first distance from the rotational axis R, in this case from the central body 10, to a radial level at a second larger distance from the
30 rotational axis R, the second larger distance being smaller than the dis-

tance between the rotational axis R and the circumferential parts of the conveyor threads 11a and 11b, respectively, in the area of the disc 12. Hereby, a gap 12a is formed between the circumferential part of the disc 12 and the rotor part 3, said gap extending about the rotational axis R
5 except in two areas in which the gap is filled out by the conveyor threads 11a and 11b.

A hollow shaft 13 extends from above into the rotor 1 through the interior of the rotor axis 4 and supports the central body within the rotor. A stationary inlet pipe 14 intended for a liquid compound to be treated in the
10 rotor 1 extends through the shaft 13. The inlet pipe 14 opens in a first space 15 in the central body 10. The first space 15 is delimited at its lower axial end by a partition 16, which prevents the liquid compound from flowing further downwards within the central body 10. At its upper
15 axial end the space 15 is delimited by a cone-shaped member 17. The cone-shaped member 17 is arranged such that a gap 18 is formed between this and the inlet pipe 14. At its upper axial end the space 15 communicates with a second space 19 through the gap 18. The central body 10 has one or more holes 20 connecting the first space 15 with the
20 separation chamber of the rotor 1, which is formed between the central body 10 and the surrounding rotor part 3 above said disc 12. The central body 10 also has one or more holes 21 connecting the second space 19 with said separation chamber of the rotor 1.

25 The central body 10 comprises two parts; a first upper part 22 and a second lower part 23. The parts are releasably connected with each other and for this purpose the lower part 23 has a substantially cylindrical portion 24, which on its outside has axially running ribs and grooves, which are in engagement with similar ribs and grooves formed on the inside of a
30 likewise substantially cylindrical portion 25 of the upper part 22 of the

central body 10. The two parts 22 and 23 of the central body 10 are thus drivingly connected to each other.

The annular disc 12 (see figure 3) comprises two diametrically opposed portions 26 and 27, of which one portion 26 forms a part of the conveyor thread 11a and the other portion 27 forms a part of the conveyor thread 11b. Furthermore, the disc 12 comprises two diametrically opposed additional portions 28a and 28b, each of which forms one of two baffles bridging the respective (two) screw-shaped flow paths; which are formed between the conveyor threads 11a and 11b.

As indicated in figure 2 the different parts 22 and 23 of the screw conveyor may be coupled together by being brought axially towards each other. Then the annular disc 12 is placed between the parts 22 and 23 and is kept in place by these parts when they are coupled together.

After the coupling of the parts 22 and 23 together they are kept axially together by means of a bar 29 arranged within the central body 10 (see figure 1). The bar 29 extends from the space 15 through the partition 16 and further axially through the whole of the lower part 23 of the body 10. Mounted in the way mentioned above a screw conveyor 2 is obtained having two flow paths, which are delimited by and between the conveyor threads 11a and 11b extending like screw threads side by side along and about the central body 10. Said disc 12 bridges the flow paths to prevent liquid from flowing along these towards the outlet 7. What may by-pass the disc 12 downwards is only sludge, which has been separated from the compound entering through the inlet pipe 14 and which is supplied axially by the conveyor threads 11a and 11b along the inside of the rotor part 3 through the gap 12a between the disc 12 and the rotor part 3.

The disc 12 forms a partition, which divides the interior of the rotor 1 into a separation chamber 30 above the disc 12 and an outlet chamber 31 for sludge below the disc 12. The two chambers 30 and 31 are, thus, in communication with each other only through the gap 12a.

5

By means of the disc 12 it is possible, if desired, to maintain a free liquid surface in the separation chamber 30 at a level radially inside the level of the outlet 7 for separated sludge without having liquid accompanying the sludge out through the outlet 7.

10

The above described decanter centrifuge operates as follows.

The rotor 1 and the screw conveyor 2 are kept in rotation at somewhat different rotational velocities about the rotational axis R. A compound of
15 liquid and particles suspended therein, having a greater density than the liquid, is supplied into the rotor from above through the inlet pipe 14. The compound flows through the first space 15 and the holes 20 into the rotor, wherein the liquid is brought into rotation. A free liquid surface is formed in the rotor at the level 9, the position of which is determined by the over-
20 flow outlet 8 at the upper part of the rotor. Whereas the liquid flows helically about the central body 10 and out through the liquid outlet 6, separated solid particles deposit on the inside of the rotor part 3. By the screw conveyor 2 such particles in the form of sludge are transported along the inside of the rotor part 3 past the disc 12 and further along the inside of
25 the rotor part 5 towards and out through the sludge outlet 7 of the rotor.

As to the special function of the disc 12, reference is made to US 3 885 734 and WO 99/65610.

CLAIMS

1. A screw conveyor (2) intended and formed for use in a decanter centrifuge for separation of solid particles from a fluid compound, in which such particles are suspended in a liquid having a smaller density than the particles, the decanter centrifuge comprising
- a rotor (1), which has an inlet (14) for said compound, an outlet (7) for separated solid particles and an outlet (6) for liquid having been freed from solid particles, and which rotor (1) is rotatable about a rotational axis (R) at a first velocity, and
 - a screw conveyor (2), which is arranged in the rotor (1) and is rotatable about the rotational axis (R) at a second velocity different from the first velocity,
- the screw conveyor (2) comprising
- a central body (10), which extends along the rotational axis (R),
 - at least one conveyor thread (11a; 11b), which extends like a screw thread along and about the central body (10) and is supported by the same such that a screw shaped flow path is formed around the body (10),
 - at least one baffle (12), which bridges said flow path between different parts of the conveyor thread (11a; 11b) to prevent free movement of liquid and solid particles along the flow path towards said outlet (7) for solid particles, and
 - at least two originally separate parts (22, 23), each of which comprises a portion of said conveyor thread (11a; 11b) and which are kept together axially, said baffle (12) constituting a separate member arranged to be kept in place between said parts (22, 23) of the screw conveyor, when these are kept together axially,

characterized in

- that said separate member has a portion (26; 27), which forms a part of the conveyor thread (11a; 11b) in an area where the conveyor thread intersects with and extends past the baffle (12).

5 2. A screw conveyor according to claim 1, in which said separate member is arranged to be kept in place by said parts (22, 23) of the screw conveyor (2), when these parts are kept together axially.

3. A screw conveyor according to claim 1 or 2, in which said parts (22,
10 23) of the screw conveyor (2) are detachably connected to each other.

4. A screw conveyor according to any one of claims 1-3, in which each of said screw conveyor parts (22, 23) comprises a part of the central body (10).

15

5. A screw conveyor according to any one of claims 1-4, in which each of said screw conveyor parts (22, 23) comprises a substantially cylindrical portion (24; 25) having axial ribs and grooves, one of the parts having internal ribs and grooves and another one of the parts having external
20 ribs and grooves, arranged to keep the parts of the screw conveyor drivingly coupled together.

6. A screw conveyor according to any one of claims 1-5, in which the parts (22, 23) of the screw conveyor are arranged to be axially together
25 by means of a member (29), which extends axially through a part of the central body (10).

7. A screw conveyor according to any one of claims 1-6, in which

- two conveyor threads (11a, 11b) extend like screw threads along and about the central body (10) and are supported by the same such that two screw shaped flow paths are formed around the body (10), and
 - there is a baffle (28a; 28b) of the defined kind for each of said flow
- 5 paths; the baffles (28a, 28b) bridging the respective flow paths between different sections of the conveyor threads (11a, 11b) to prevent free movement of liquid and solid particles along the flow paths towards said outlet (7) for solid particles.
- 10 8. A screw conveyor according to claim 7, in which the baffles (28a, 28b) are formed as one single member (12), which is arranged to bridge said two flow paths and to be kept in place between said two parts (22, 23) of the screw conveyor (2).
- 15 9. A screw conveyor according to claim 8, in which said single member (12) has substantially the form of an annular disc having two diametrically opposed portions (26, 27), of which one portion (26) forms a part of one (11a) of said conveyor threads and the other portion (27) forms a part of the other one (11b) of said conveyor threads.
- 20 10. A screw conveyor according to claim 9, in which the annular disc (12) comprises two diametrically opposed additional portions (28a, 28b), each forming one of said two baffles, which bridge the respective two screw-shaped flow paths.
- 25 11. A screw conveyor according to any one of claims 1-8, in which said at least one baffle (28a; 28b) bridges its flow path from a radial level at a first distance from the rotational axis (R) to a radial level at a second greater distance from the rotational axis (R), the second greater distance
- 30 being smaller than the distance between the rotational axis (R) and the

circumferential part of said conveyor thread (11a; 11b) in the area of the baffle (28a; 28b) in question.

12. A screw conveyor according to claim 9 or 10, in which said baffles (28a, 28b) bridge respective flow paths from a radial level at a first distance from the rotational axis (R) to a radial level at a second greater distance from the rotational axis (R), the second greater distance being smaller than the distance between the rotational axis (R) and the circumferential parts of said conveyor threads (11a, 11b) in the areas of the baffles (28a, 28b) in question.

This Page Blank (uspto)

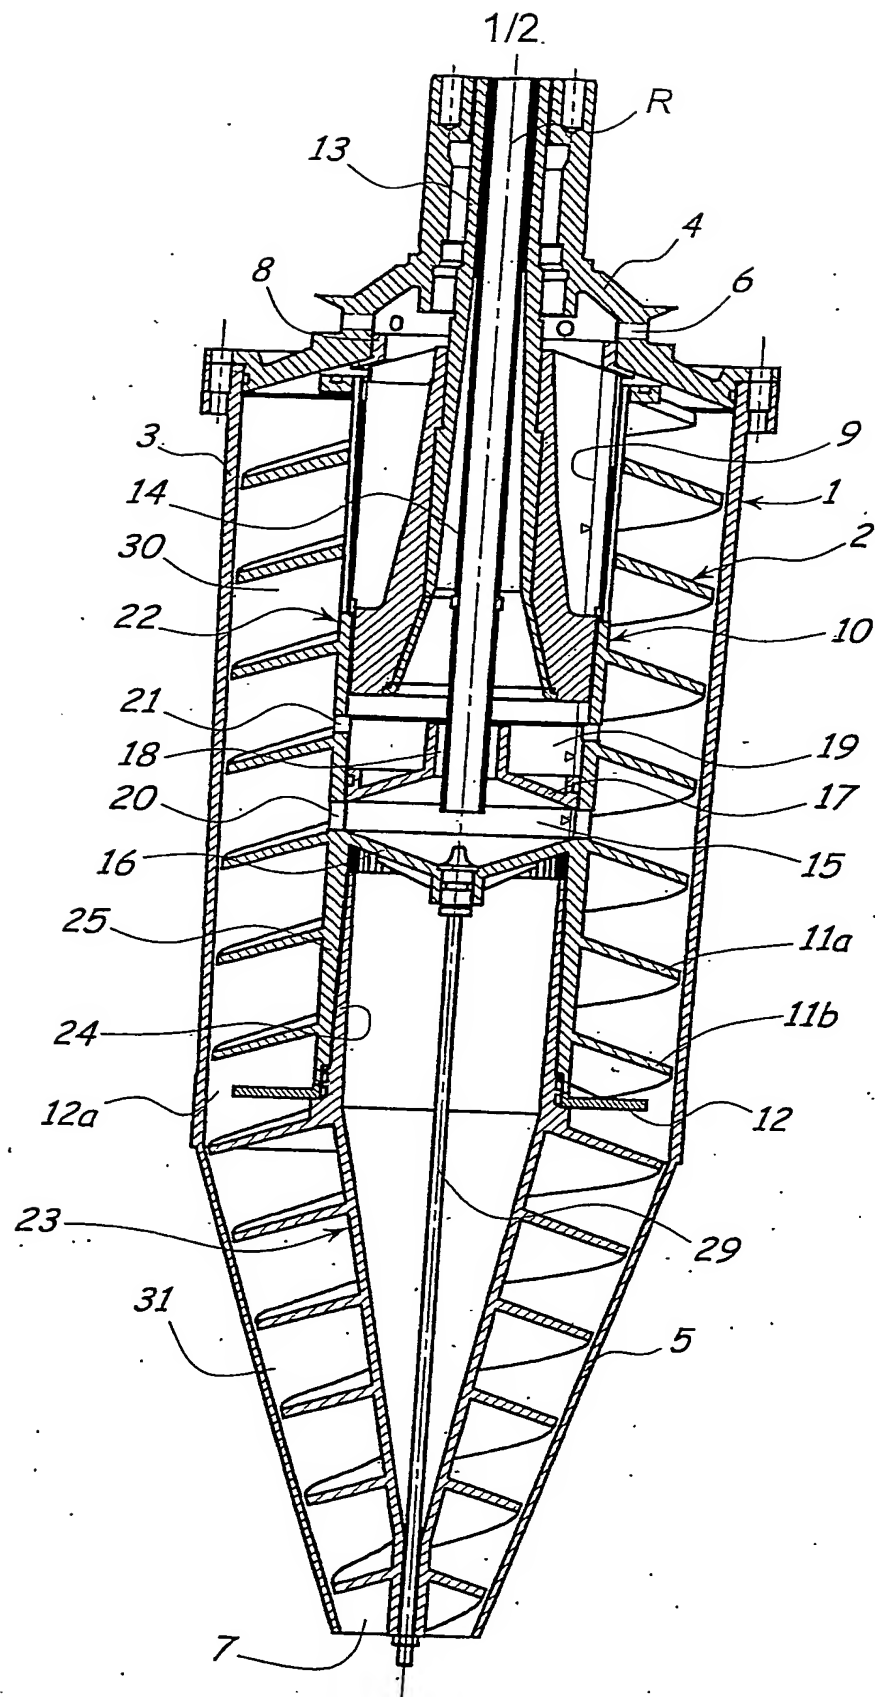


Fig. 1

This Page Blank (uspto)

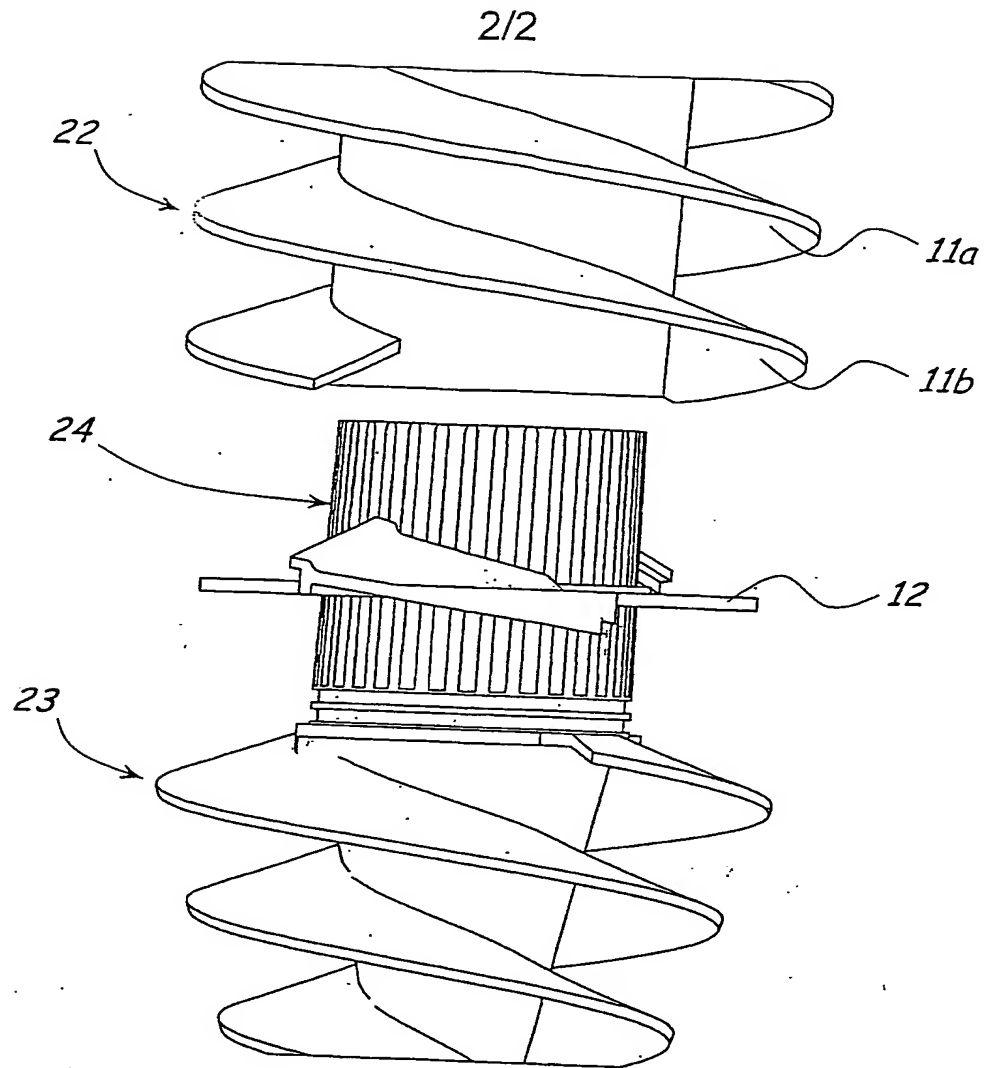


Fig. 2

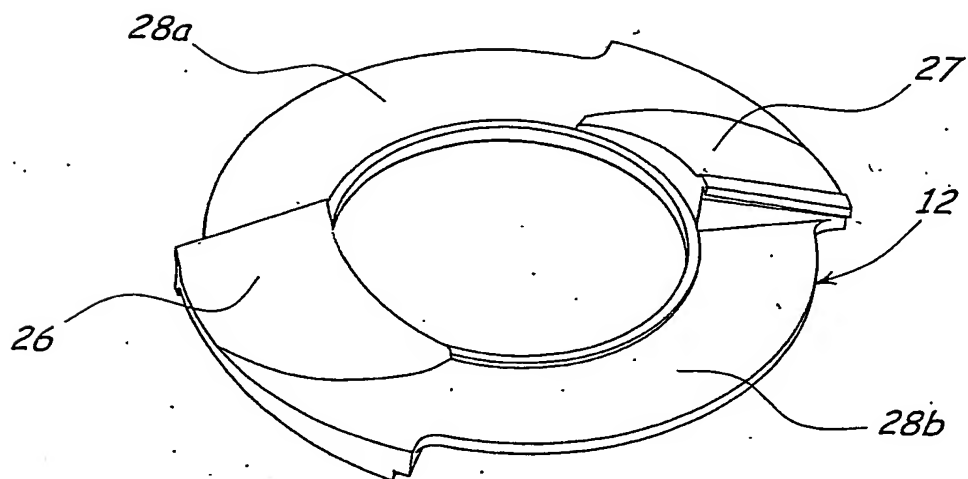


Fig. 3

This Page Blank (uspto)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2004/000814

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: B04B 1/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: B04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5800332 A (GARY L. HENSLEY), 1 Sept 1998 (01.09.1998), column 6, line 29 - line 41, figure 1 --	1-12
A	EP 0602766 A2 (ALFA-LAVAL SEPARATION INC.), 7 June 2000 (07.06.2000), whole document --	1-12
A	EP 0520010 B1 (ALFA-LAVAL SEPARATION A/S), 19 October 1994 (19.10.1994), whole document --	1-12
A	US 3885734 A (CHIE-YING LEE), 27 May 1975 (27.05.1975), figures 1-5, claims 1-6, abstract --	1-12



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

16 Sept 2004

Date of mailing of the international search report

20 -09- 2004

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Fredrik Andersson/MP

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2004/000814

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4245777 A (ANDRE C. LAVANCHY), 20 January 1981 (20.01.1981), figures 1-6, claims 1-10, abstract -- -----	1-12

INTERNATIONAL SEARCH REPORT

Information on patent family members

31/07/2004

International application No.

PCT/SE 2004/000814

US 5800332 A 01/09/1998 NONE

EP 0602766 A2 07/06/2000

SE	0602766 T3	
CA	2092980 A,C	18/06/1994
DE	69328817 D,T	12/10/2000
DK	602766 T	07/08/2000
JP	3473974 B	08/12/2003
JP	6206005 A	26/07/1994
US	5354255 A	11/10/1994

EP 0520010 B1 19/10/1994

SE	0520010 T3	
DE	69104715 D,T	04/05/1995
DK	65190 A	14/09/1991
DK	170967 B	09/04/1996
JP	2987519 B	06/12/1999
JP	5505557 T	19/08/1993
US	5374234 A	20/12/1994
WO	9113686 A	19/09/1991

US 3885734 A 27/05/1975

BR	7306872 D	00/00/0000
CA	965757 A	08/04/1975
DE	2344507 A,C	14/03/1974
DK	138383 B,C	28/08/1978
FR	2197658 A,B	29/03/1974
GB	1408997 A	08/10/1975
JP	1022405 C	28/11/1980
JP	49086951 A	20/08/1974
JP	53013058 B	08/05/1978
MY	39078 A	31/12/1978
NL	170382 B,C	01/06/1982
NL	7312320 A	08/03/1974
NO	139202 B,C	16/10/1978
SE	435794 B,C	22/10/1984
US	3795361 A	05/03/1974

US 4245777 A 20/01/1981

CA 1131598 A 14/09/1982

This Page Blank (uspto)